



PARK-HEAT

HOT AIR BLOWER General Catalog

Manufacturing ISO approved factory
High Durability With Brushless Motor

■ PARK-HEAT LINE UP

	Type	Power Supply (V)	Heater Capacity (W)	Limit of Usable Max Temp(°C)	Air Capacity (L/Min)	Static Pressure (Pa)	Noise Level (Db)	Weight(kg)	Dimension (mm)	Temperature Regulation
	PHW1-2.3	Single-Phase 230	1370	Normal~650 (continuously regulation)	230	3000	60	1.2 (including power supply cord)	330×φ56	Exist
	PHW2-2.3	Single-Phase 230	3020	Normal~650 (continuously regulation)	500	3000	65	1.4 (including power supply cord)	320×φ56	Exist
	Type	Power Supply (V)	Heater Capacity (W)	Limit of Usable Max Temp(°C)	Absorb Temperature (°C)	Minimum Requirements Air (L/Min)	Weight(kg)	Dimension (mm)	Air Volume Regulation	Temperature Regulation
	PHW7-2.3	Single-Phase 230	1350	Normal~650 (continuously regulation)	under 60	90	0.8	250×□40	Exist	Exist
	PHW7N-2.3			650 (MAX)						Non
	PHS25-2	Single-Phase 200-230	2500 -3300	Normal~650 (continuously regulation)	under 60	190-230	0.5	234×73 ×80	Exist	Exist
	PHS25N-2			650 (MAX)						Non
	PHS30-2	Single-Phase 200-230	1600 -2100	Normal~650 (continuously regulation)	under 60	120-150	0.8	228×88 ×99	Exist	Exist
	PHS30N-2			650 (MAX)						Non
	PHS30-2	Single-Phase 200-230	2700 -3550	Normal~650 (continuously regulation)		200-250				Exist
	PHS30N-2			650 (MAX)						Non
PHS30N-4	Single-Phase 400	4000	650 (MAX)	280	Non					
	PHS50N-2	Single-Phase 200-230	3400-4500	650 (MAX)	under 60	240-320	1.8	312×116 ×137	Non	Non
			3450-4550			240-320				
			4950-6550			350-460				
			6000-7900			420-560				
	PHS50N-4	3-Phase 400	4650			330				
			6600			470				
			8100	570						
	PHS100N-2	3-Phase 200-230	6000-7900	650 (MAX)	under 60	420-560	2.6	283×116 ×155	Non	Non
			7500-9900			530-700				
			10000-13200			700-930				
	PHS100N-4	3-Phase 400	5700			400				
			8100			570				
			10950			770				




<http://www.parkercorp.co.jp/>

 PARKER CORPORATION

MADE IN JAPAN ISO9001

Example of application

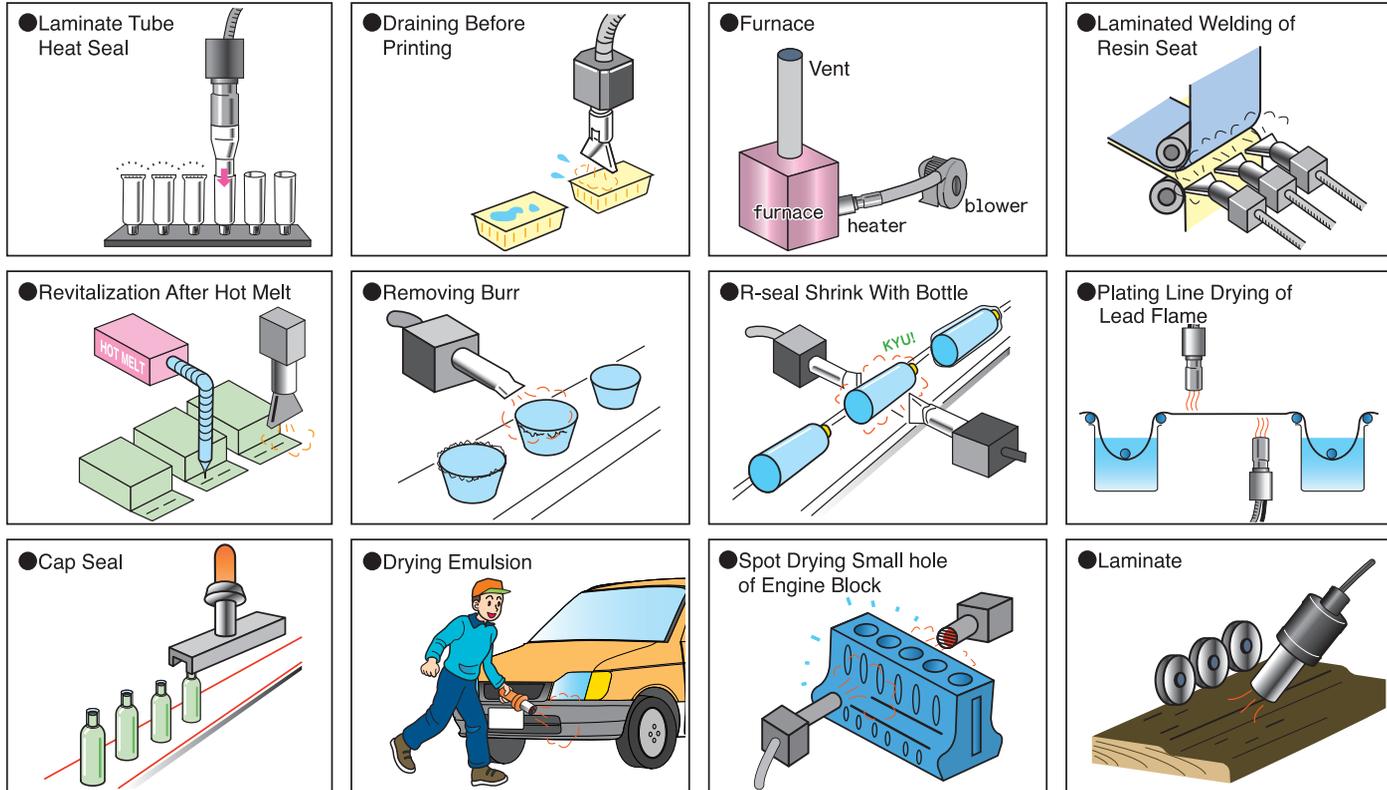


Nozzle variation We prepare variety shape of nozzle on customers request

Model number	Shape	The name of an article	Model number	Shape	The name of an article
NST		Standard Nozzle (5mm ϕ)	N2		Flat Nozzle 20mm width For Superposition
NS3/NS4/NS5		Speed Nozzle For 3,4,5mm ϕ Circle Welding Rod	N2K		60° Flat Nozzle 20mm
NS57		Speed Nozzle For 5.7mm ϕ For Triangle Welding Rod	N2L		90° Flat Nozzle 20mm
NS7		Speed Nozzle For 7mm ϕ For Triangle Welding Rod	N4		Flat Nozzle 40mm width For Superposition
NT		Temporary Miter Nozzle	R40		Silicon One Side Prop Pressure Roller
NH27		Flat Nozzle 70 \times 4mm	NH58		Flat Nozzle 85 \times 15mm
NH37		Flat Nozzle 70 \times 10mm	NH515		Flat Nozzle 150 \times 12mm
NH315		Flat Nozzle 150 \times 12mm	NH530		Flat Nozzle 300 \times 4mm
NK40		U-Shaped Nozzle The Front 60mm Width	NH1030		Flat Nozzle 300 \times 12mm

☆We also have the others including special order ●We also prepare variety of accessories like divergence, hose, hoseband

Connection

Temperature Regulation
Built In Type

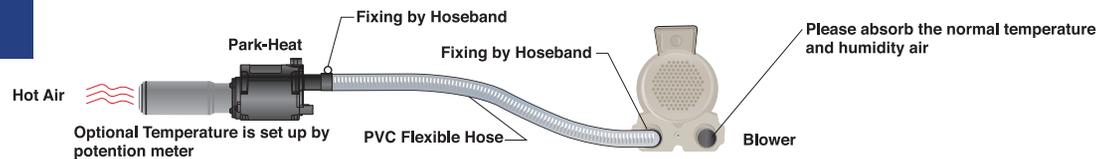

Manufacture

PARKER CORPORATION
Head Office
Machinery Department No2
2-22-1 Ningyo-Cho, Nihonbashi, Chuo-Ku, Tokyo
TEL(03)5644-0625(Sales Representative)

Osaka Branch Shin-Mido Toyosaki BLDG 2-7-5 Toyosaki, Kita-Ku, Osaka
TEL(06)6372-6240(Sales Representative)
Nagoya Branch Matsuoka BLDG 2-45-7, Naeki, Nakamura-Ku, Nagoya
TEL(052)583-7100
Kyushu Branch Kokura-Kosan KMM bekkkan, 2-11-15 Asano, Kokura Kita-Ku, Kita-Kyushu
TEL(093)511-3191

Agency